REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

HSF RoHS

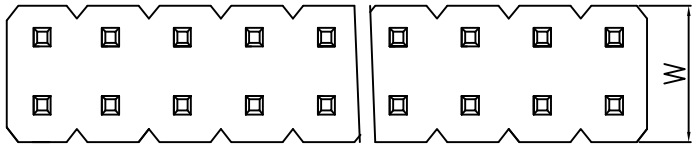

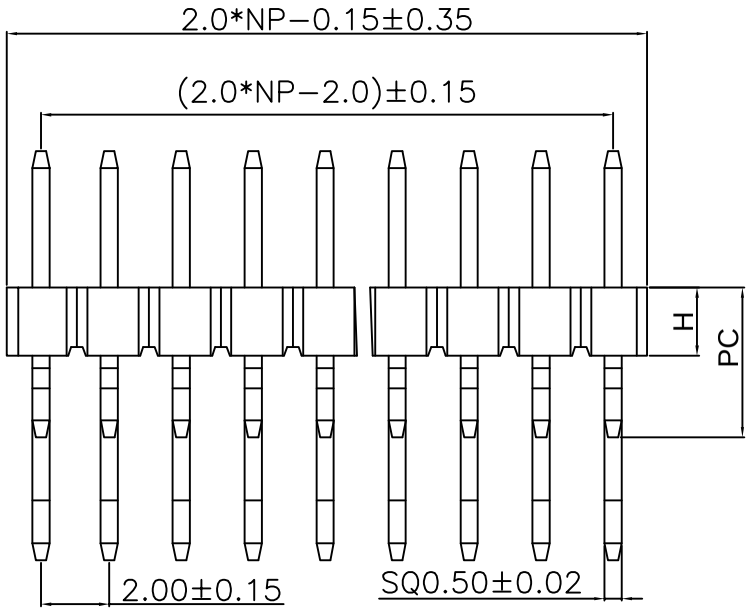

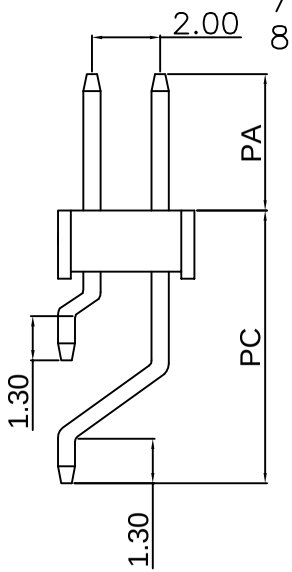

Specifications

1. Current Rating:2.0Amps
2. Insulation Resistance:1000 MΩ min.
3. Dielectric withstanding Voltage: 500V AC/DC
4. Contact Resistance:20 mΩ max.
5. Operating Temperature:-40℃ to+105℃
6. Contact Material: Brass
7. Insulation Material:Asfollows,UL94V-0,Black
8. Plated: Au Over Ni

Ordering Information

L206 XX -XX 2 X X XX X

- XX: Insulation Height*Wide (H*W) Option: 10=1.0*2.0, 15=1.5*2.3, 20=2.0*4.0
- XX: NO. of Pins Per Row: 1-50P
- X: Insulation Material Option: 1=PBT, 2=PPS, 3=NY6T, 4=LCP, 5=NY66, 6=Customized, 7=NY46, 8=NY9T
- X: Contact Plating: 0=0.8″ Gold, 1=Au1″ Gold, 2=Au1.5″ Gold, 3=Au2″ Gold, 4=Au3″ Gold, 5=Au5″ Gold, 6=Customized, 7=Gold/Tin, 8=Tin
- XX: Serial NO. 01-69
- X: Packing A=PE Bag, B=Tube, C=Tray, D=Reel

Dimension antitheses list				
ITEM	PC	PA	H	Pin Length
Standard	4.40/8.00	4.00	2.00	9.00
Alternate				

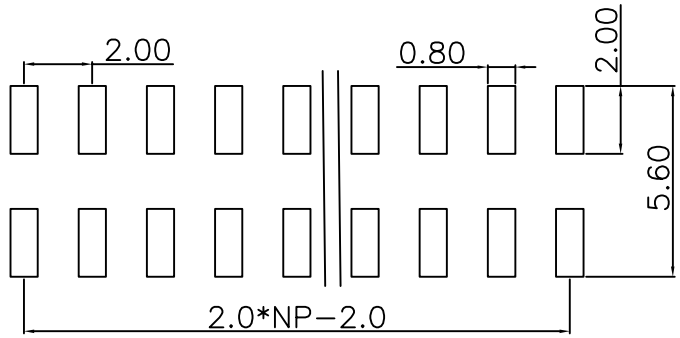

PCB LAYOUT

STANDARD TOLERANCE (EXCEPT SPECIFIED)			
LINER		ANGLES	
.0	±0.30	0.°	±3°
.00	±0.20	.0°	±2°
.000	±0.10	.00°	±1°

LDCONN 连大 东莞连大精密制品有限公司
DongGuan LianDa Precision Products Co., LTD

TITLE	PH2.00mm Pin Header Dual Row 90° SMT	DRAWN BY	YTT	16.02.03
PART NO	L20620-XX2XXXXC	CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE 1:1	UNITE mm	PAGE 1/1	SIZE A4	