
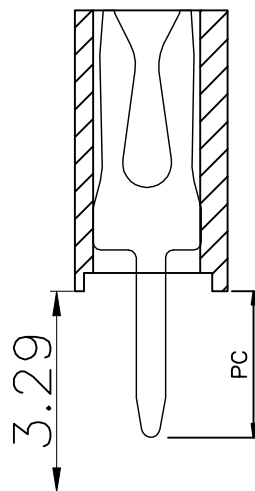
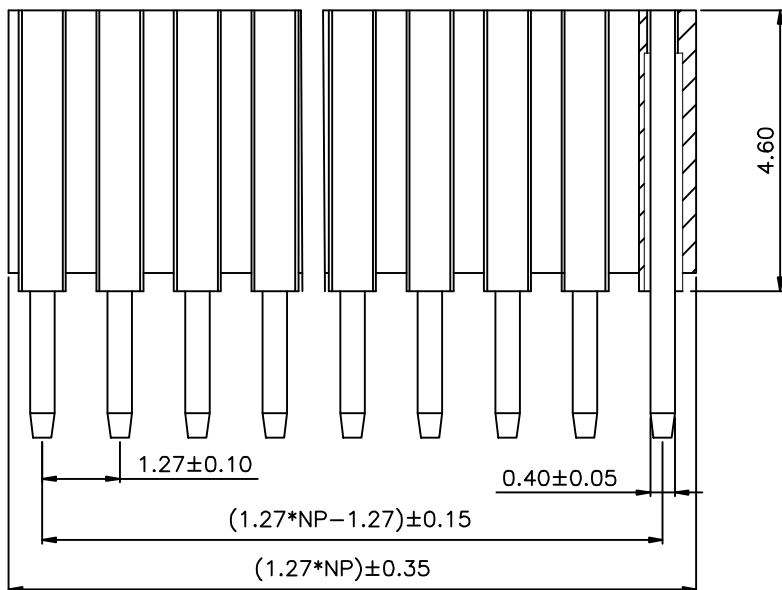


# HSF RoHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

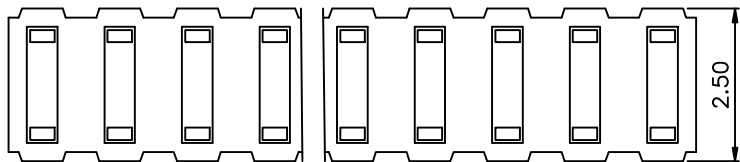

## Specifications

- 1.Current Rating:1Amps
- 2.Contact Resistance: 20mΩ
- 3.Insulator Resistance:1000 Megohms min.
- 4.Dielectric withstanding Voltage: AC/DC 500V
- 5.Operating Temperature:-40℃ to+105℃
- 6.Contact Material: phosphor Bronze
- 7.Insulator Material:Asfollows
- 8.Plated: Asfollows


## Ordering Information

L303 XX -XX 0 X X XX X

Insulation Height*Wide (H*W) Option:	NO. of Pins Per Row: 1-50P	Insulation Material Option:	Contact Plating	Serial NO.	Packing
46=4.6*2.5		1=PBT 2=PPS 3=NY6T 4=LCP 5=NY66 6=Customized 7=NY46 8=NY9T	0=0.8" Gold 1=Au1" Gold 2=Au1.5" Gold 3=Au2" Gold 4=Au3" Gold 5=Au5" Gold 6=Customized 7=Gold/Tin 8=Tin	01-69(No pillars) 70-89(pillars) 90-99(outside pillars)	A=PE Bag B=Tube C=Tray D=Reel

### Dimension antitheses list

ITEM	PC		
Standard	1.8/2.4/3.0		
Alternate			

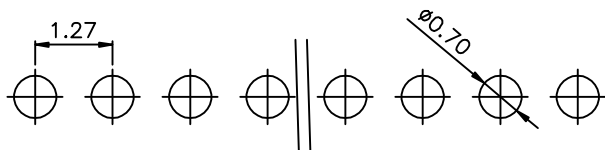

PCB LAYOUT

STANDARD TOLERANCE (EXCEPT SPECIFIED)			
LINER		ANGLES	
.0	±0.30	0.°	±3°
.00	±0.20	.0°	±2°
.000	±0.10	.00°	±1°

## LDCONN 东莞连大精密制品有限公司

大 DongGuan LianDa Precision Products Co., LTD

TITLE	PH1.27mm H4.6mm 1XNP 180° Single row Female Header Y Type	DRAWN BY	Lujunhui	18.03.30
PART NO	L303XX-XX0XXXXX	CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE 1/1
				SIZE A4