

HSE ROHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		




Specifications

1. Current Rating: 3Amps
2. Contact Resistance: 20mΩ
3. Insulator Resistance: 1000 Megohms min.
4. Dielectric withstanding Voltage: AC/DC 1000V
5. Operating Temperature: -40°C to +105°C
6. Contact Material: Copper alloy
7. Insulator Material: As follows
8. Plated: As follows

Ordering Information

L307 XX-XX 0 X XX X

Insulation Height*Width Per Row (H*W)	NO. of Pins	Insulation Material	Contact Plating	Serial NO.	Packing
Option: 68-6, 8*3, 5	1-40P	Option: 1=PPR 2=PPS 3=NY6T 4=LCP 5=NY66 6=Customized 7=NY46 8=NY9T	0=0, 8° Gold 1=Au1° Gold 2=Au1, 5° Gold 3=Au2° Gold 4=Au3° Gold 5=Au5° Gold 6=Customized 7=Gold/Tin 8=Tin	01-69 (No pillars) 70-89 (pillars) 90-99 (outside pillars)	A=PE Bag B=Tube C=Tray D=Reel

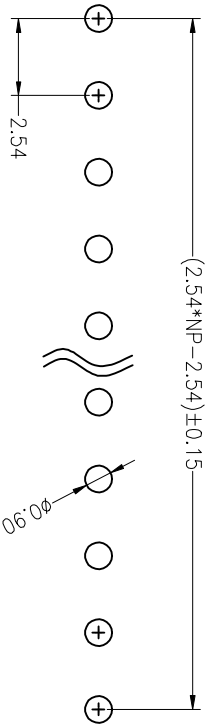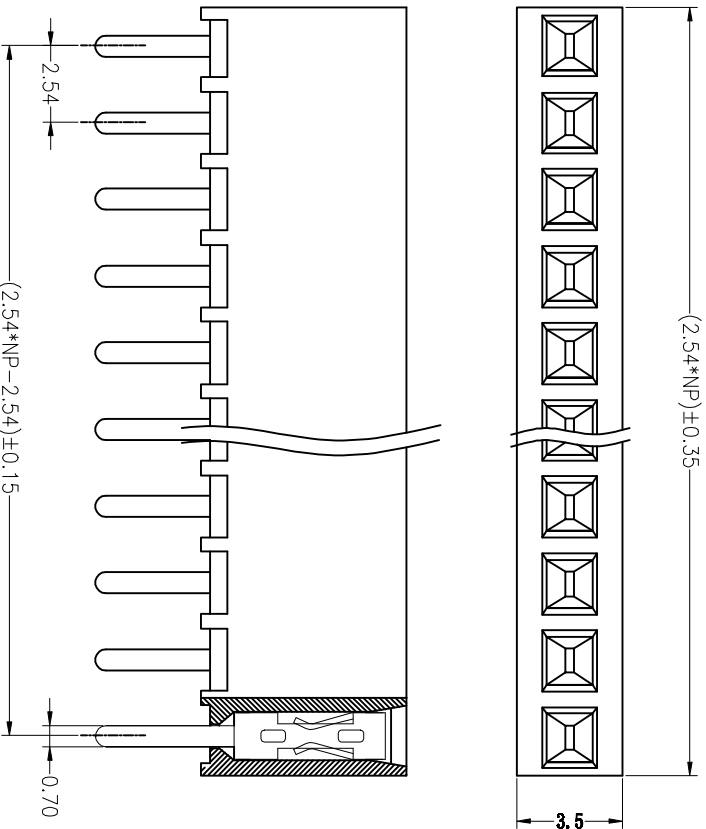

PCB LAYOUT

STANDARD TOLERANCE (EXCEPT SPECIFIED)	LINER	ANGLES
.0	±0.30	0.°
.00	±0.20	.0°
.000	±0.10	.00°
		±1°

LDCONN 东莞连大精密制品有限公司 Dongguan Lianda Precision Products Co., LTD		TITLE PH2.54mm H6.8mm 1XNP 180° Single row Female Header		DRAWN BY LuJunhui		DATE 18.04.03	
PART NO L307XX-XX0XXXXX		CHECKED BY		APPROVED BY			
DRAWING NO							
SCALE 1:1		UNIT mm		PAGE 1/1		SIZE A4	