

HSE RoHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		





Specifications

1. Current Rating: 3Amps
2. Contact Resistance: 20mΩ
3. Insulator Resistance: 1000 Megohms min.
4. Dielectric withstanding Voltage: AC/DC 1000V
5. Operating Temperature: -40°C to +105°C
6. Contact Material: Copper alloy
7. Insulator Material: As follows
8. Plated: As follows

Ordering Information

L308 XX-XX 0 X XX X

Insulation Height*W/ide (H*W)	NO. of Pins Per Row	Insulation Material	Contact Plating	Serial NO.	Packing
Option: 68=6.8*5.7	1-40P	Option: 1=PPR 2=PPS 3=NY6T 4=LCP 5=NY66 6=Customized 7=NY46 8=NY9T	0=0.8" Gold 1=Au1" Gold 2=Au1.5" Gold 3=Au2" Gold 4=Au3" Gold 5=Au5" Gold 6=Customized 7=Gold/Tin 8=Tin	01-69 (No pillars) 70-89 (pillars) 90-99 (outside pillars)	A=pp Bag B=Tube C=Tray D=Reel

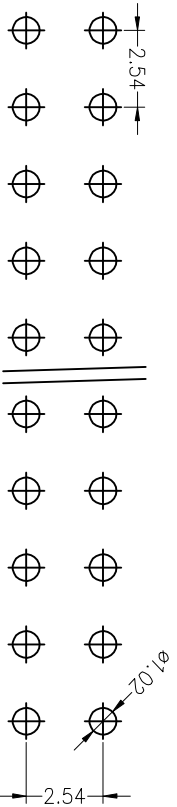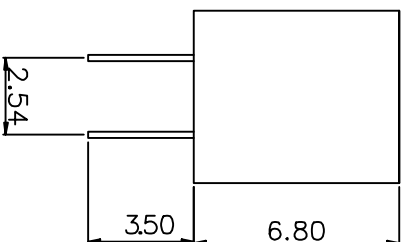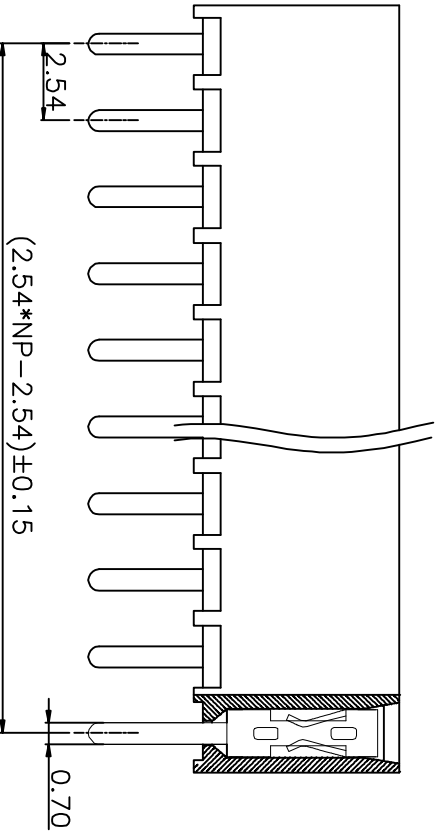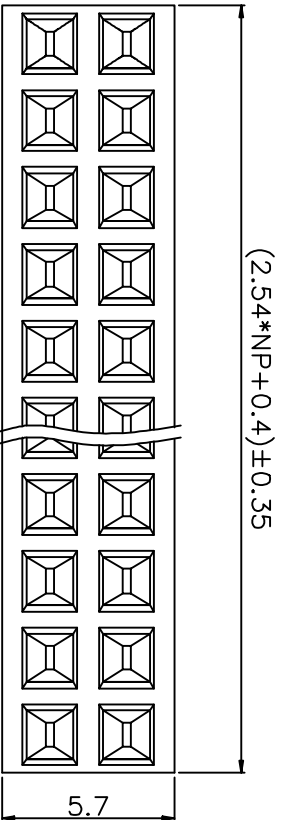

PCB LAYOUT

STANDARD TOLERANCE (EXCEPT SPECIFIED)	LINER	ANGLES
.0 ±0.30	0.°	±3°
.00 ±0.20	.0°	±2°
.000 ±0.10	.00°	±1°

TITLE	PART NO	DRAWING NO	SCALE	UNIT	PAGE	SIZE
LDCONN 东莞连大精密制品有限公司 Dongguan LianDa Precision Products Co., LTD	L308XK-XK0XXXXX	PH2.54mm 2XNP 180° Dual Row Female Header	1:1	mm	1/1	A4
DRAWN BY	CHECKED BY	APPROVED BY				
LuJunhui						