


HSF RoHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

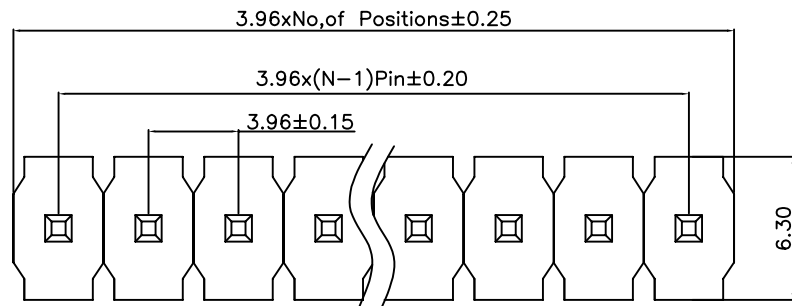



Specifications

- 1.Current Rating:5.0Amps
- 2.Insulation Resistance:1000 MΩ min.
- 3.Dielectric withstanding Voltage:1000V AC/DC
- 4.Contact Resistance:20 mΩ max.
- 5.Operating Temperature:-40°C to+105°C
- 6.Contact Material: Brass
- 7.Insulation Material:Asfollows,UL94V-0,Black
- 8.Plated: Au Over Ni


Ordering Information

L487XX - 0 X XX X

PIN数每排 1-40P	产品类型 0=180° 1=90° 2=SMT 9=焊线式	电镀规格 0=Au0.8" 1=Au1" 2=Au1.5" 3=Au2" 4=Au3" 5=Au5" 6=Au10" 7=半金锡 8=镀亮锡 9=镀雾锡	流水号 01-69不带柱 70-99带内柱	包装类型 A=袋装 B=管装 C=盘装 D=卷装
-----------------	---	--	-----------------------------	--------------------------------------

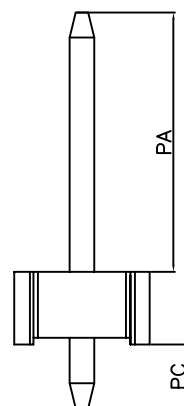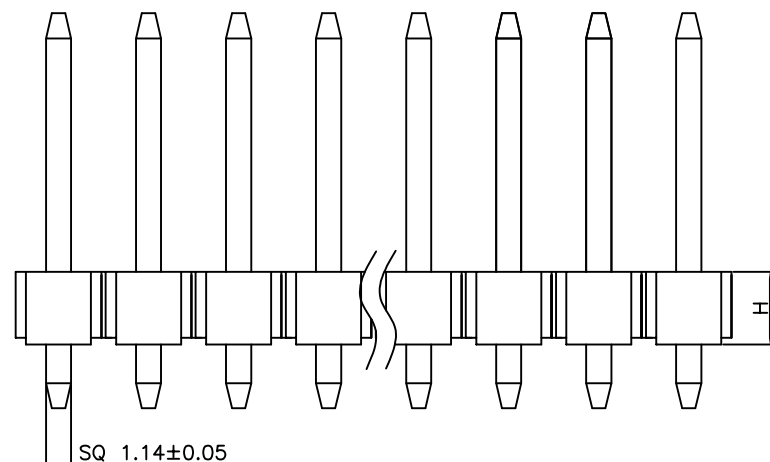

Dimension antitheses list				
ITEM	PC	PA	H	Pin Length
Standard	2.80	11.40	3.20	17.4
Alternate				

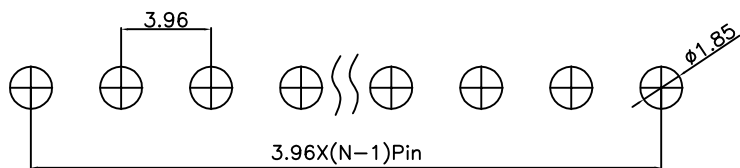

PCB LAYOUT

STANDARD TOLERANCE (EXCEPT SPECIFIED)	
LINER	ANGLES
.0 ±0.30	0.° ±3°
.00 ±0.20	.0° ±2°
.000 ±0.10	.00° ±1°

LDCONN 东莞连大精密制品有限公司
 鹿大 DongGuan LianDa Precision Products Co., LTD

TITLE	PH3.96mm Pin Header Single Row 180°	DRAWN BY	YTT	16.02.03
PART NO	L487XX-0XXXX	CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNIT	mm	
PAGE	1/1	SIZE	A4	