
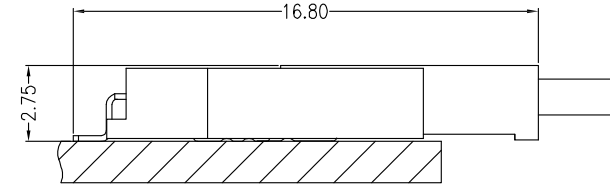
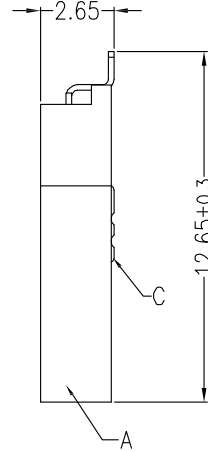


REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW	11/23-'19	HYJ

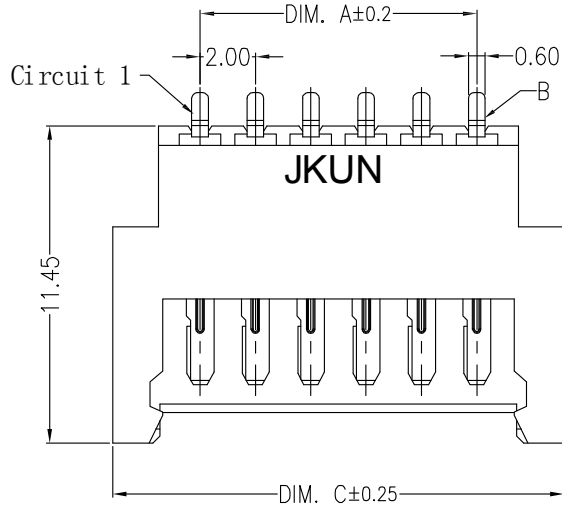




Assembly Layout

Main Specifications

Poles) :02 to 16
 Contact resistance: ≤20m Ω
 Insulation resistance: ≥1000M Ω
 Rated voltage: 125V AC DC
 Rated current: 2.0A AC DC
 Withstand Voltage: 500V AC/minute
 Temperature Range: -40° C~+120° C

ORDER INFORMATION:

L2007AWR-XX-F5MB1-X			
PART No.		PACKAGING:	R=REEL
No. OF CIRCUITS:	02~08	G=TUBE	P=PE
PLASTIC MATERIAL:	F5M=LCP(BEIGE)	Metal code:	I=PhosphorBronze
		PLATING:	B=MATTE Sn

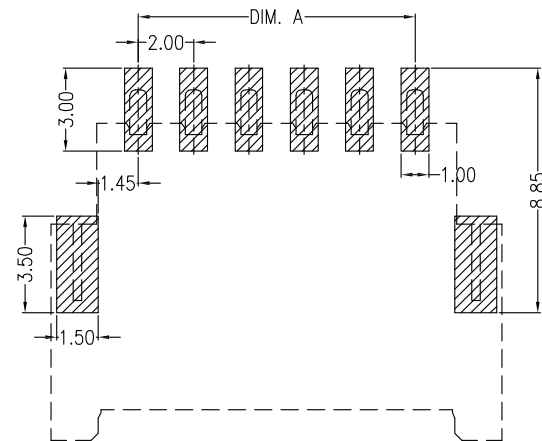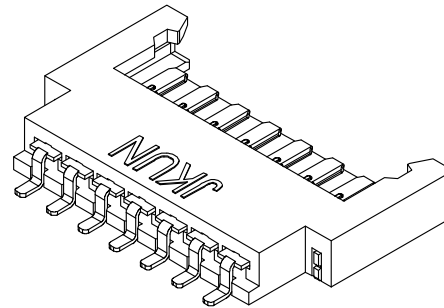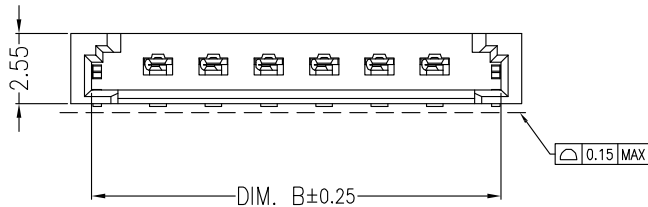

SUGGESTED PCB LAYOUT

Circuits	Dimensions (mm)		
	DIM. A	DIM. B	DIM. C
02	2.00	6.80	8.30
03	4.00	8.80	10.30
04	6.00	10.80	12.30
05	8.00	12.80	14.30
06	10.00	14.80	16.30
07	12.00	16.80	18.30
08	14.00	18.80	20.30

STANDARD TOLERANCE
(EXCEPT SPECIFIED)

LINER	ANGLES
.0 ±0.30	0.° ±3°
.00 ±0.20	.0° ±2°
.000 ±0.10	.00° ±1°

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C	SOLDERTAB	2 PCS	Brass	Sn-plated
B	CONTACT	2~8 PCS	PhosphorBronze	MATTE Sn-plated
A	PEDESTAL	1 PCS	LCP	UL 94V-0, COLOR:BEIGE

LDCONN 东莞连大精密制品有限公司

连大 DongGuan LianDa Precision Products Co., LTD

TITLE	2.00mm PITCH 90° WAFER SMT TYPE	DRAWN BY	HYJ	11/23-'19
PART NO		CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE 1/1
		SIZE	A4	